

# Comfort and Indoor Air Quality

## CO2, Temperature and Humidity Ambient Sensor

TX CO2 T&H AMB 600-023



- ✓ Indoor air quality measurement
- ✓ Compatible with LoRaWAN & Enless proprietary LoRa
- ✓ High-capacity D-type battery
- ✓ Up to 5 years of autonomy
- ✓ Very long radio range

### Technical Specifications

#### Physical Characteristics

Protection rating	IP40
Mounting	Wall-mounted
Operating temperature	-20 / +55°C
Power supply	Replaceable Lithium 3.6V D-type battery
Battery life	2 years for a transmission every 30 minutes (SF9)

#### Radio

Supported protocols	LoRaWAN (Class A) and Enless proprietary LoRa
Frequency	868MHz
Addressing	LoRaWAN = DEVEUI, APPEUI, APPKEY (OTAA) Enless LoRa ID for proprietary LoRa
Encryption	LoRaWAN = AES128 No encryption for proprietary LoRa
Transmission power	25mW (14 dBm)

## Measurements

### CO2

CO2 measurement range 0 - 5000 ppm

CO2 measurement accuracy +/- 100 ppm

### Temperature

Sensor measurement range -40 / +125°C

Sensor accuracy +/- 0.2°C

Sensor resolution 0.1°C

### Humidity



Sensor accuracy +/- 2% RH

Sensor resolution 0.1% RH

## Certifications



## Dimensions (mm)

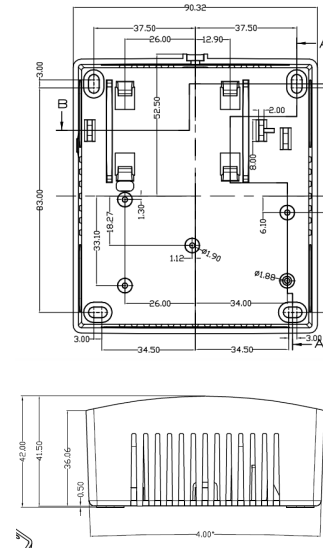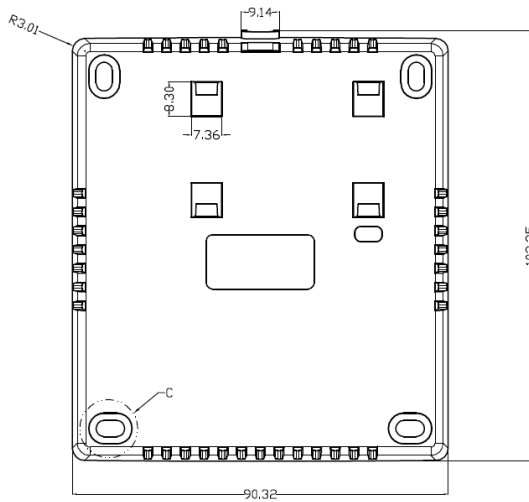

DTM45-h



+3903311480496

sales@qlsol.com

Via Matteotti 193, 21044, Cavaria con Premezzo Italy

<https://www.qlsol.com>